


A NEW MECCANO MODEL

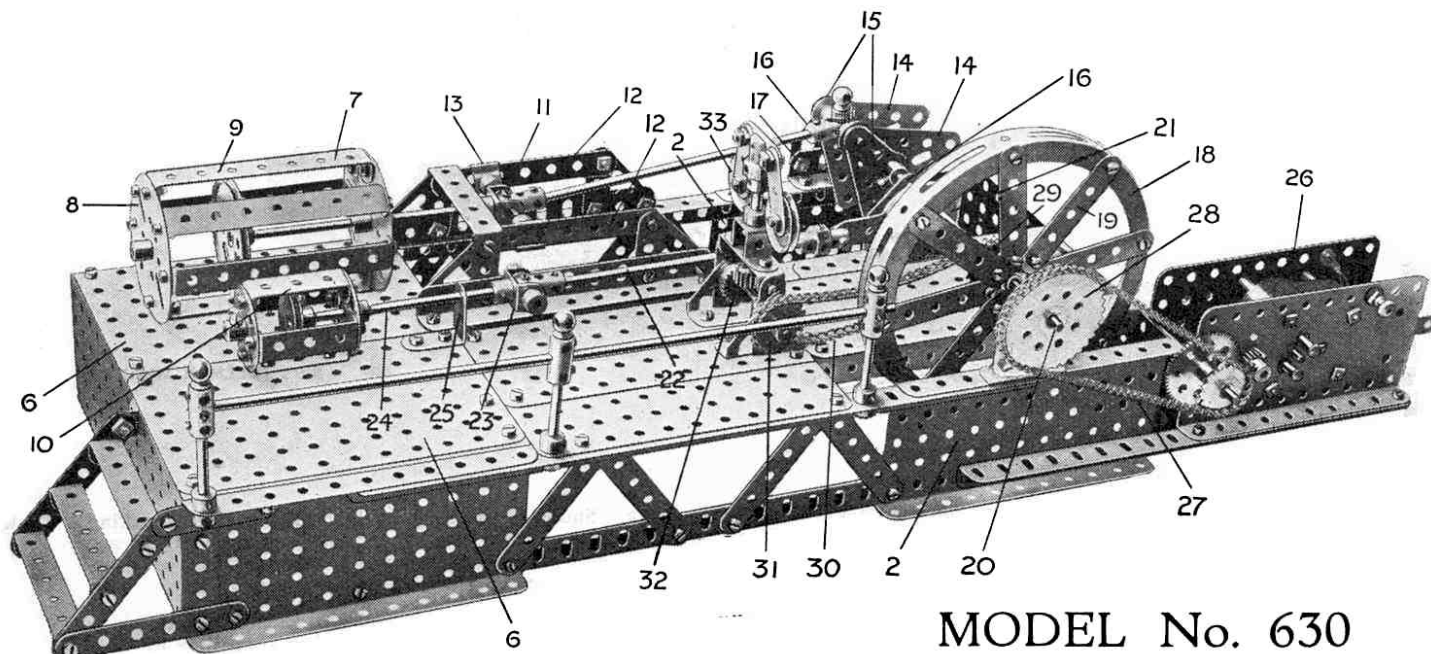

MODEL No. 630

Horizontal Steam Engine

THIS month we have chosen as the subject of our new model a horizontal steam engine of the single-cylinder type, such as may be seen driving machinery in mills or factories. In this engine steam is admitted to the cylinder first at the front of the piston and then at the back. The piston is thus pushed alternately backwards and forwards, and from this movement such engines are called "reciprocating." The type of reciprocating engine illustrated is one of the simplest, and yet in spite of its simplicity the combined efforts of many inventors were necessary to produce it.

It is interesting to go back to the early days of the steam engine and see how it has developed, step by step, from a mechanical curiosity to a perfect working apparatus.

First Practical Steam Engine

James Watt is commonly regarded as the inventor of the steam engine, but as a matter of fact a number of engines using steam had been produced before his time. Watt's great work lay in bringing the steam engine to a state of practical perfection.

The idea of using steam in a cylinder appears to have originated with Denis Papin, a Frenchman, and about the year 1688 he constructed a working model to illustrate his idea. The first really practical engine was constructed in 1710 by Thomas Newcomen, an Englishman, and it was used as a pumping engine. It consisted of a vertical steam cylinder, the piston of which was connected to one end of a beam pivoted in the middle.

The other end of the beam was attached to rods working the pump. Around the cylinder was a jacket, to which cold water could be supplied.

When the piston in the working cylinder was at the top of its stroke, being raised by the weight of the pump rods, steam was admitted to the cylinder so as to drive out all the air. The steam was then shut off and cold water was admitted to the outer jacket. This condensed the steam in the working cylinder so that a partial vacuum was produced, and atmospheric pressure forced the piston down, thereby raising the pump rods. Each time this occurred one stroke of the pump was made and the operation was then repeated. Newcomen's engine, improved later in some details by its inventor, was used extensively in pumping water from mines. It will be seen that the engine was not a true steam engine, for the forcing down of the piston was done by atmospheric pressure.

James Watt's Great Idea

A model of the Newcomen engine came into the hands of James Watt for repair, and while engaged on this task he hit upon the idea on which the modern steam engine is based.

In the Newcomen engine the working cylinder was first heated by steam and then cooled by water to condense the steam. Watt saw that this alternate heating and cooling resulted in a great waste of energy, and endeavoured to find some means of keeping the cylinder at an even temperature. It took him a long time to solve the problem, but at last he succeeded by condensing the

steam in a separate vessel, instead of in the working cylinder itself.

Talkative Workman Causes Trouble

Watt's improved engine, patented in 1769, was used entirely for pumping, as Newcomen's had been. In 1781 Watt took out another patent for an engine in which the reciprocating motion of the piston was converted into rotary motion, so that ordinary machinery could be driven. Watt had intended to obtain this rotary motion by means of the now familiar crank and flywheel, but he found himself prevented from doing so because a Birmingham button-maker named James Pickard had succeeded in obtaining a patent for this device a few months previously. Pickard apparently got the idea from one of Watt's workmen, who had been talking too freely and bragging about the great things that the rotary engine was going to accomplish.

Watt was very angry when he found what had happened, and for a while he was puzzled to overcome the difficulty thus created. He determined not to be beaten, however, and after trying various schemes he decided to use a device invented by his best workman, William Murdoch. This device was called the "sun-and-planet" motion, and was utilised on Watt's rotary engines until Pickard's patent expired, after which the simpler and more efficient crank and flywheel were substituted.


Watt's Final Improvements

Up to this time Watt's engines were "single acting"—that is to say the

FOR YOUR NEXT BIRTHDAY PRESENT CHOOSE

HORNBY CLOCK WORK TRAINS


The Trains with the Guarantee

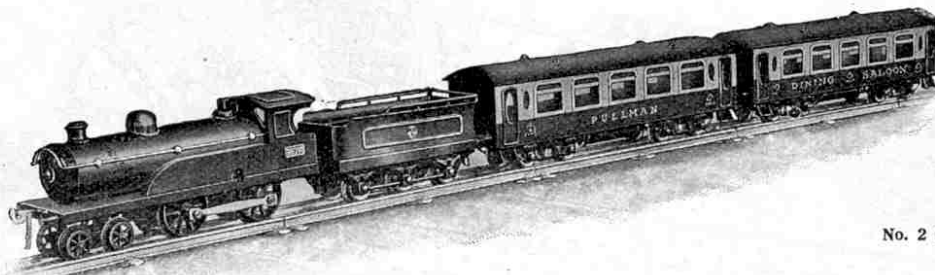

No. 2 PULLMAN TRAIN

You have no idea how much fun you can have with a Hornby Train. Shunting, coupling-up the rolling stock and making up trains to dash around their track as realistically as the real thing, will give you hours of pleasure. Hornby Trains are beautifully finished, strongly made, and will last for ever. One of their most remarkable features is that they may be taken to pieces and rebuilt. All the parts are standardised and any lost or damaged part may be replaced with a new one.

There are over 40 train accessories—stations, signals, lamps, a variety of wagons, level-crossings, turntables, etc., each of which is built in correct proportion and beautifully finished. New accessories are added to the system from time to time. Ask your dealer to show you the latest specimens or send to Meccano Ltd., Binns Road, Liverpool, for a full price list which will be sent (post free) on application.

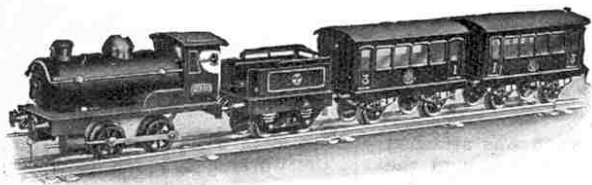

No. 1 PASSENGER TRAIN




No. 1 GOODS TRAIN

HORNBY TRAIN PRICES

No. 1			
Goods Set	...	25/6	Wagons each 3/9
Passenger Set	...	35/-	Tenders " 3/6
Locos	...	each 16/-	Passenger Coaches .. 6/6

No. 2			
Goods Set	...	45/-	Wagons each 3/9
No. 2 Pullman Set	...	70/-	Tenders " 4/-
Locos	...	each 30/-	Pullman Cars " 16/-

HORNBY TANK LOCOS

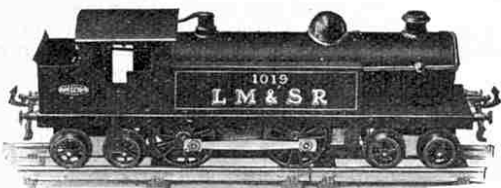


No. 2

The Hornby No. 2 Tank Loco is a powerful model embodying all the characteristics of the Hornby Train. It is 11½" in length and is fitted at both ends with a special bogey. Beautifully finished in colours; lettered L.M.S. and L.N.E.R., with reversing gear, brake and governor. Suitable for 2 ft. radius rails only.

Price 32/6

Guarantee

Hornby and Zulu Trains are tested, and their efficiency is guaranteed. A form of guarantee is furnished with each loco, and we undertake to repair, or replace at our option any loco that fails to run satisfactorily from any cause other than misuse, within 60 days of purchase.

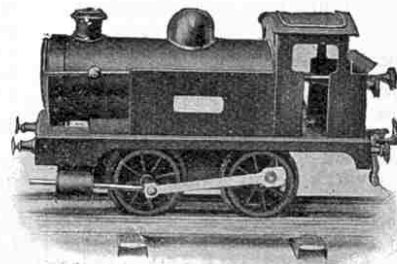

No. 1

The Hornby Tank Loco No. 1 is a strong and durable loco capable of any amount of hard work; richly enamelled and highly finished; fitted with reversing gear, brake and governor.

Gauge 0, in black only 12/6

FROM ALL MECCANO DEALERS

A New Meccano Model (cont. from page 151)

cylinder was connected to the condenser only on one side of the piston, so that work was only performed during one stroke of the piston. In 1782 Watt took out a patent for connecting the cylinder to the condenser both back and front of the piston, thus making the engine "double acting," and consequently much more efficient.

In the same year he obtained another patent for a method of securing greater economy in the use of steam. The principle involved in this final improvement was that of shutting off steam from the cylinder when the piston had only travelled part of its journey, and leaving the rest of the thrust to be carried out by the expansion of the steam.

The brilliant inventions we have briefly described were Watt's chief contributions towards the perfecting of the steam engine. Watt found the steam engine a clumsy mechanism, very inefficient and wasteful of fuel, and only capable of working a pump. Through his inventions it became efficient and economical, and capable of working machinery of almost every kind.

Constructing the Model

This fine new model of a Horizontal Steam Engine may be made with a No. 6 Outfit, and its construction presents no difficulty. Begin by building the platform, an underneath view of which is shown in Fig. A.

Three 12½" girders (1) are bolted to rectangular plates (2) at each end of the frame, other 12½" girders (3) being bolted to the remaining flanges of the girders. The ends of the bed frame are formed by small rectangular plates (4), and 3" strips (5) brace the inner part of the frame.

As shown in the illustration on page 151, a portion of the top of the bed frame is enclosed by flat plates (6), and on these is bolted the cylinder (7) formed of face plates (8) connected by 3½" double angle strips (9). The valve-casing (10) is formed of bush wheels connected by 1½" double angle strips and is also bolted to the bed frame.

The cross-head (11), the construction of which will be followed from the illustration, is guided on the strips (12) by eye pieces

(13) at each side. The crank is made up of triangular plates (14) representing the balance weights, secured to cranks (15). The main or crank shaft (20) is journalled

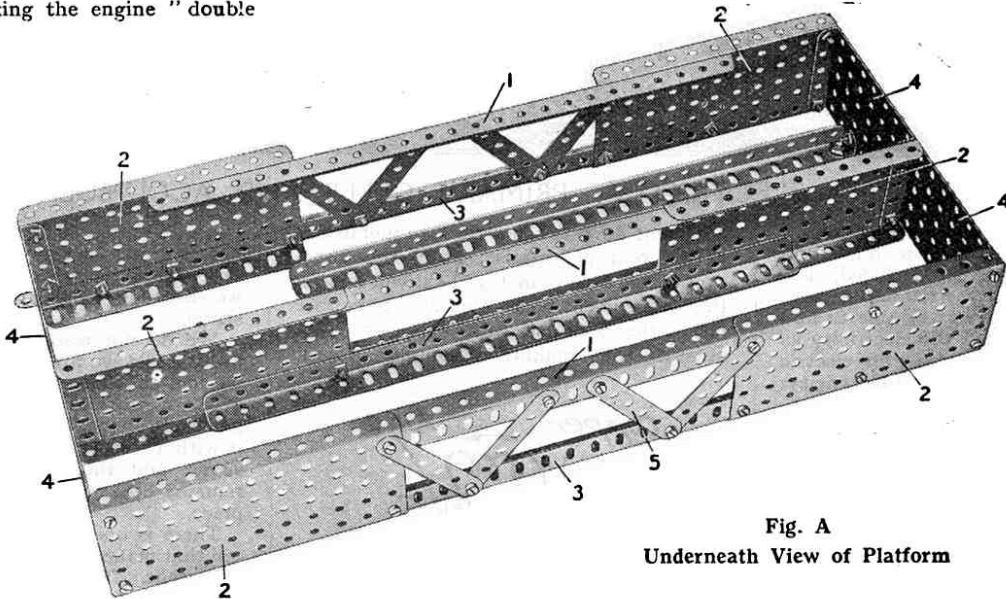


Fig. A
Underneath View of Platform

in flat trunnions (16) secured to 1½" girders (17), which are in turn bolted to the flanges of the rectangular plates (2).

Driving Details

The fly-wheel is made of a large wheel flange (18) connected by strips (19) to a bush wheel secured to the shaft (20). The eccentric (21) is pivotally connected by a rod (22) to the fork piece (23) on the valve rod (24), which slides in the 1" angle bracket (25).

The motor (26) drives by sprocket chain (27) a 2" gear wheel (28) on the shaft (20). A 1" sprocket wheel (29) drives, by sprocket chain (30), another 1" sprocket wheel (31) in the governor.

A contrate wheel (32) on the rod of the sprocket wheel (31) drives a ½" pinion on

the vertical rotating rod of the governor, the weights of which are formed by two pulley wheels (33) pivotally hung by 1½" strips, lock-nutted in the outer holes of a horizontal 1½" strip. This strip is bolted in the slot of an octagonal coupling secured to the top of the vertical rod of the governor.

In the operation of an engine such as the model represents, the valve (10) controls the admission of steam to each end of the cylinders (7), thus causing the crank shaft (20) to be driven. When the engine speed increases too much, the weights (33) of the governor fly out and shut off steam,

causing the engine to slow down again. The governor thus keeps the engine speed constant.

Interesting Paragraphs

Duct Keels for Liners

It is reported that two Orient liners are to be fitted with duct keels. The chief advantage of this system is the fact that the water-tight bulkheads have not to be pierced for piping, and the ship is therefore more seaworthy should any collision occur.

* * * *

A Powerful Overhead Travelling Crane

An overhead travelling crane recently installed in the River Rouge repair shop of the Detroit, Toledo and Ironton Railway at Detroit, Mich., lifts a locomotive weighing 100 tons and turns it end for end in one minute. The grab has two sets of falls spaced 7 ft. apart, and is mounted on a turntable.

* * * *

Hydraulic Tunnel at Niagara

The new hydraulic pressure tunnel of the Niagara Falls Power Company, which has cost some £500,000 to construct, was recently opened for public inspection. This tunnel, which is 4,300 ft. in length and has a diameter of 32 ft. with a 2 ft. thick concrete lining, runs from an intake on the upper river, half a mile above the Falls, to another intake on the banks of the lower Gorge. The tunnel carries a volume of water sufficient to operate three hydro-electric power units, each of 70,000 horse-power capacity, in the powerhouse addition below the Gorge bank.

Parts required for Construction of Meccano Model 630 Horizontal Steam Engine			
2 of No. 3	1 of No. 13	1 of No. 29	2 of No. 63b
11 " " 4	2 " " 14	160 " " 37	3 " " 70
8 " " 5	1 " " 15	20 " " 38	2 " " 76
1 " " 6	1 " " 15a	1 " " 45	26 " " 94
5 " " 6a	2 " " 16	4 " " 48	1 " " 95
7 " " 8	2 " " 16a	4 " " 48a	3 " " 96
1 " " 8a	5 " " 17	6 " " 48b	2 " " 109
3 " " 9	2 " " 18a	7 " " 50	2 " " 116
1 " " 9d	1 " " 20a	2 " " 52	1 " " 118
3 " " 9f	1 " " 22	2 " " 52a	2 " " 126
4 " " 10	2 " " 22a	4 " " 53	3 " " 126a
2 " " 11	3 " " 24	16 " " 59	4 " " 133
2 " " 12	3 " " 26	4 " " 62	3 " " 136
1 " " 12a	2 " " 27a	6 " " 63	1 4-volt Elec. Motor

The Meccano Clock

Full instructions for building the Meccano Clock are now available in the form of a beautifully-printed leaflet, with numerous illustrations. This will be sent, post free, to any address, price 4d. Similar leaflets dealing with the Meccano Chassis and Loom are also in stock, price 4d. each, post free. If ordered at the same time a copy of each leaflet will be sent, post free, price 10d. the three.

ELECTRICITY

*A series of Splendid Articles
specially written for Meccano Boys*

IV. CURRENT ELECTRICITY: PRIMARY CELLS AND ACCUMULATORS

IN our previous article we saw that if a metal rod is held in the hand and rubbed, electricity is produced, but it spreads at once over the rod and escapes through the hand. If we are able to find some means of renewing the electricity as fast as it escapes, we obtain an electric current, or a continuous flow of electricity.

Voltaic Cells

Fig. 17 is a diagram of a Voltaic Cell, from the name of its originator, Volta, whom we have already mentioned. The cell consists of a glass jar containing water to which has been added a little sulphuric acid. Two metal strips, one of zinc and the other of copper, are placed in the jar as shown at Z and C. If the two strips are connected by a piece of wire, an electric current flows in the direction indicated by the arrows. The current is produced by a difference of "electrical potential" between the zinc and the copper.

Electrical Pressure

To understand the meaning of electrical potential we may make use of a simple illustration with water. If we pour water into a vessel, a certain amount of water pressure is produced. This could be made to do work by allowing the water to flow out through a small opening in the vessel on to a model water wheel. The amount of pressure available depends upon the height of the water, and this again depends upon the quantity of water and the capacity of the vessel, for it is clear that a certain quantity of water will reach a greater height in a small vessel than in a larger one.

A certain quantity of electricity in a conductor produces a certain electric pressure, the amount of this pressure depending upon the quantity of electricity and the electrical capacity of the conductor, for, as in the case of water vessels, conductors vary in capacity. This electrical pressure is called "potential." Water always tends to flow from a high level to a lower level, and in the same way electricity tends to flow from a conductor of high potential to one of lower potential.

The whole subject of electrical potential is complicated, but to put the matter in the simplest way, we regard a positively electrified body as being at a relatively high potential, and a negatively electrified body as being at a relatively low potential. We assume, therefore, that an electric current flows from a positive conductor to a negative conductor.

When we connect by a wire the two strips of metal in a voltaic cell,

a current flows because the two metals are at different potentials. From the direction of the arrows in Fig. 17 it will be seen that the current flows from zinc to copper inside the cell, and from copper to zinc outside, thus making a complete round

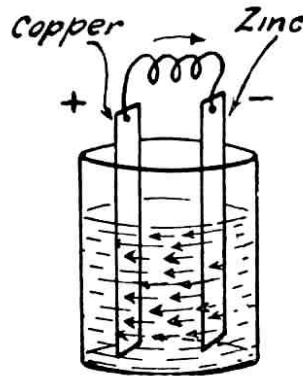


Fig. 17. Voltaic Cell

called a "circuit." If we break the circuit by disconnecting the wire, the current ceases to flow. The copper strip where the current leaves the cell is called

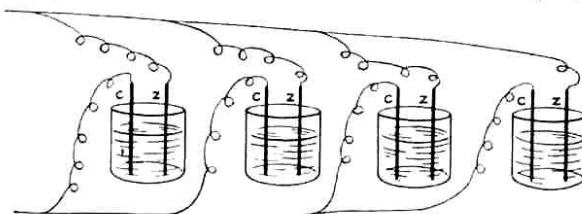


Fig. 18. Connecting in Parallel

the positive pole, and the zinc strip the negative pole.

Chemical Action

The difference of potential between the two strips is maintained by chemical action between the zinc and the acid, resulting in weakening the acid and eating

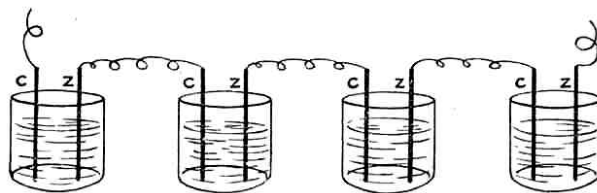


Fig. 19. Connecting in Series

away the zinc. The current continues to flow as long as this chemical action goes on. When we wish to stop the current, we disconnect the wire joining the metal strips.

We do not want the zinc to be eaten away while we are not using the cell, but we find that chemical action still goes on. We can stop this, however, by "amalgamating" the zinc, that is, by covering it with a thin coating of mercury or quicksilver, and then as long as the circuit remains broken, no chemical action takes place.

There is one great defect in the voltaic cell that makes it almost useless as a source of current. This defect is that the current it produces does not remain at full strength, but soon begins to weaken rapidly. This weakening is caused by bubbles of hydrogen gas which gather on the surface of the copper strip during the chemical action. These bubbles soon form a film on the copper, and they weaken the current partly by offering increased resistance to its flow, and partly by trying to set up another current in the opposite direction. A cell in this condition is said to be "polarized."

Types of Cells

Many cells have been devised to reduce or prevent polarization. One of the most effective of these is the "Daniell" cell. This consists of an outer vessel of glass containing a circular copper plate. Inside this plate stands a round pot of unglazed porous ware, in which is a rod of amalgamated zinc. The outer vessel is filled with a very strong solution of copper sulphate, and the porous pot with dilute sulphuric acid.

When the circuit is closed and the current flows, the hydrogen set free by the action of the zinc on the acid passes through the porous pot into the outer vessel. Here another chemical action takes place, resulting in the splitting up of the copper sulphate solution into copper and sulphuric acid. There is now no free hydrogen to cause polarization, and instead of gas, pure copper is deposited on the copper plate.

Much more familiar than the Daniell is the Leclanché cell, used for ringing electric bells. In this cell carbon is used in place of copper. In the outer glass jar is a zinc rod immersed in a solution of sal-ammoniac. The inner porous pot contains a carbon plate surrounded by a mixture of crushed carbon and manganese dioxide. Hydrogen is liberated by the chemical action in the outer jar, but before it can reach the carbon plate and cause