

MODEL OF THE MONTH

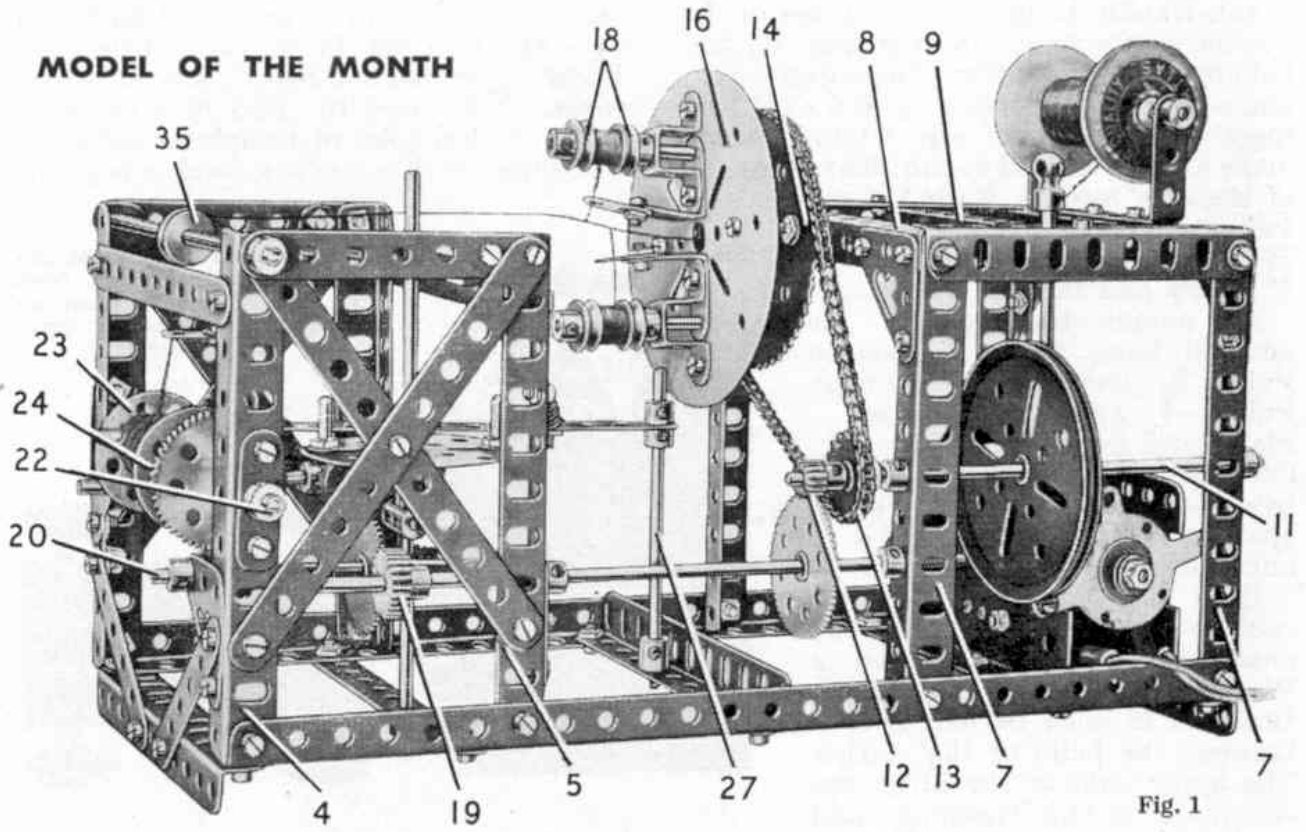


Fig. 1

# Wire Covering Machine

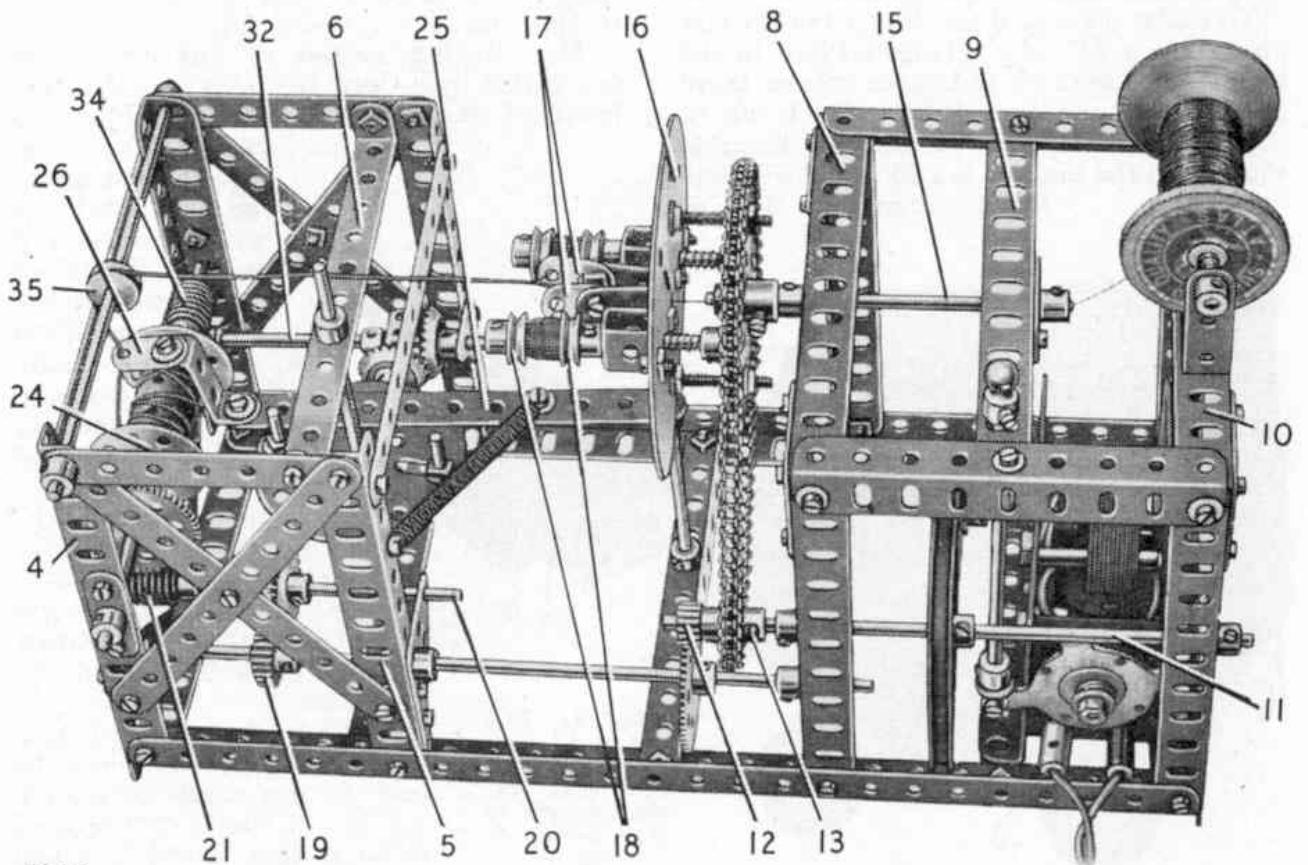


Fig. 2

Fig. 1. An attractive model of a Wire Covering Machine designed for covering wire with two layers of cotton or other insulating material.

Fig. 2. A semi-plan view of the Wire Covering Machine.

Fig. 3. The Wire Covering Machine seen from underneath.

OUR model this month is another splendid example of the way in which industrial machines can be reproduced with Meccano parts. It is a machine designed to insulate wire by covering it with double layers of cotton or silk, and once it has been set working the action is fully automatic.

Models of wire covering machines have been made before with Meccano, but this example is noteworthy for the outstandingly even way in which the layers of insulating material are wound on the wire. It is notable too because of the novel use it makes of one of the recent additions to the range of parts—the 4" Rod with Keyway. The use of this part has simplified the design of the machine considerably.

The model is driven by an E20R(S) Electric Motor that provides drives to the carrier for the reels of insulating threads and the take-up drum for the insulated wire. The reels are formed by  $\frac{1}{2}$ " Pulleys on Rods supported by a special carrier, through the centre of which is passed the uncovered wire. The ends of the threads are tied to the wire, and the wire itself is fastened to the take-up drum at one end of the machine. This is all the setting up that is required.

When the Electric Motor is set working it rotates the thread carrier through suitable reduction gearing, and the threads are wound round the wire. At the same time the wire is pulled slowly through the centre of the carrier and is wound on the take-up drum. The wire is fed on to the drum by an ingenious cam-operated guide arm, which moves to and fro to distribute the wire evenly so that it can be unwound freely from the drum after the covering operation.

The thread carrier is mounted freely between Collars at one end of a 4" Rod with

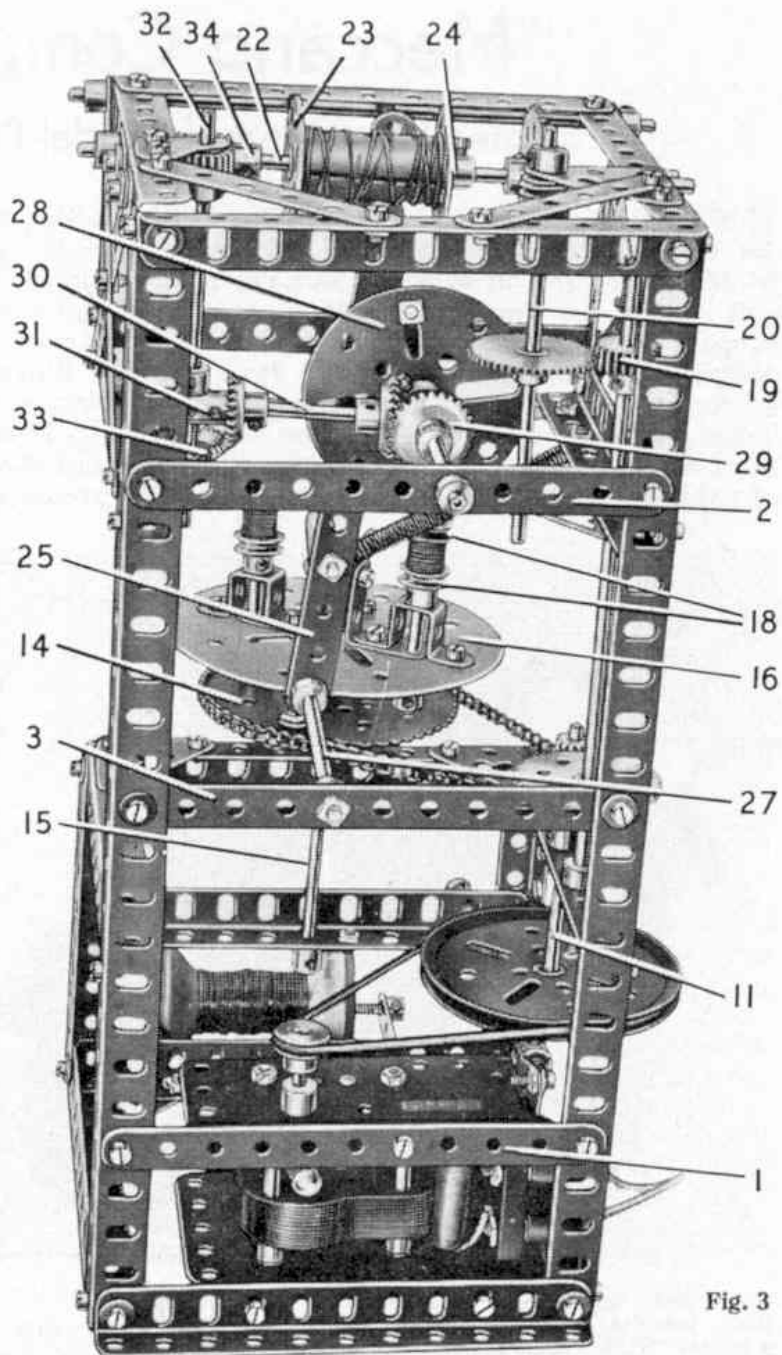


Fig. 3

Keyway. The Rod with Keyway is fixed in place at one end of the framework and the uncovered wire is led along its slot so that it passes through the centre of the thread carrying assembly. Thus this assembly is able to rotate on the 4" Rod with Keyway without twisting the wire, and the wire can be drawn through the centre of the thread carrier. The uncovered wire is drawn from a reel mounted at one end of the frame.

The machine is fascinating to watch in operation, and it produces covered wire that is hardly distinguishable from the commercial product. The model is remarkable for its compact design and the

(Continued on page 526)

## MODEL OF THE MONTH

### WIRE COVERING MACHINE

Illustrated in the October 1957 issue of the "Meccano Magazine"

#### Construction of the Frame

The base of the frame consists of two  $12\frac{1}{2}$ " Angle Girders connected at their ends by  $5\frac{1}{2}$ " Angle Girders, and with two  $5\frac{1}{2}$ " Strips 1 and 2 and a  $5\frac{1}{2}$ " Angle Girder 3 bolted between them as shown in Fig. 3. At one end of the base two  $5\frac{1}{2}$ " Angle Girders 4 and 5 are fixed to each side. The upper ends of these Girders are connected by a  $3\frac{1}{2}$ " Strip and the assembly is braced by diagonal  $5\frac{1}{2}$ " Strips. The Girders 4 and 5 are connected to the corresponding parts on the other side by  $5\frac{1}{2}$ " Strips, and a  $5\frac{1}{2}$ " x  $\frac{1}{2}$ " Double Angle Strip 6 is bolted between the  $3\frac{1}{2}$ " Strips. The structure is braced by two 3" Strips at the end of the frame.

At the right hand end of the frame (Fig. 1) two  $5\frac{1}{2}$ " Angle Girders 7 are bolted vertically to each side. These Girders are connected at their upper ends by a  $4\frac{1}{2}$ " Angle Girder, and they are connected to the Girders of the opposite side by  $5\frac{1}{2}$ " Angle Girders 8, 9 and 10. This end of the frame is strengthened by four  $1\frac{1}{2}$ " Corner Brackets as shown in Fig. 1.

#### Arrangement of the Main Drive

An E20R(S) Electric Motor is bolted to the frame at one end and a  $\frac{1}{2}$ " Pulley is fixed on its armature shaft. This Pulley is connected by a Driving Band to a 3" Pulley on a  $6\frac{1}{2}$ " Rod 11, mounted in the Girders 7 on one side and held in place by Collars. The Rod carries a 7/16" Pinion 12 and a 1" Sprocket 13. The Sprocket is connected by Chain to a 3" Sprocket 14, which is free to turn between two Collars on a 4" Rod with Keyway 15. The Rod with Keyway is supported in the Girders 8 and 9, and is fixed in a Double Arm Crank bolted to the Girder 9. An End Bearing lock-nutted to the Motor switch carries a Rod that passes through the Girder 9 and is fitted with a Handrail Coupling.

A 4" Circular Plate 16 is fixed by nuts on two  $1\frac{1}{8}$ " Bolts, and these are fixed in the Sprocket 14 by further nuts. Two Double Bent Strips and two 1" x 1" Angle Brackets are bolted to the Circular Plate. Each Angle Bracket is extended by a Fishplate 17, those being arranged slightly out of line as shown in Fig. 2 by making use of their slotted holes. Two  $2\frac{1}{2}$ " Rods are mounted in the Double Bent Strips and the Circular Plate, and each Rod carries two  $\frac{1}{2}$ " fixed Pulleys 18. Each Rod is held in place by a Collar with a Compression Spring placed on the Rod between the Collar and the Circular Plate 16.

#### The Wire Take-Up Drum and the Feeding Mechanism

An 8" Rod is supported in the Girders 4 and 5 and one of the Girders 7 of one side, and is held in place by Collars. A 60-tooth Gear on the Rod is driven by the Pinion 12, and a  $\frac{3}{4}$ " Pinion 19 engages a 50-tooth Gear on a  $4\frac{1}{2}$ " Rod 20, which carries a Worm Gear 21. Rod 20 is mounted in  $1\frac{1}{2}$ " Corner Brackets bolted to the Girders 4 and 5 of one side.

The Worm 21 engages a 57-tooth Gear on a  $6\frac{1}{2}$ " Rod 22 supported in  $1\frac{1}{2}$ " Strips bolted to the Girders 4. This Rod carries the take-up drum for the covered wire. The drum is made by passing a Sleeve Piece over a Socket Coupling, which is fixed to the boss of a Bush Wheel 23. A Grub Screw in the Socket Coupling engages in a hole in the Sleeve Piece to fix the drum to the Rod 22. A Chimney Adaptor is pushed into the Sleeve Piece and a Bush Wheel 24 completes the assembly.

The covered wire is fed on to the drum by a guide arm 25. This

is a 5 $\frac{1}{2}$ " Strip fitted at one end with a 1" Reversed Angle Bracket that supports a Fishplate 26. The arm pivots between two Collars on a 3 $\frac{1}{2}$ " Rod 27, which is fixed in a Rod Socket attached to the Girder 3. The arm is moved to and fro along the length of the drum by the action of two Threaded Pins in a Face Plate 28. The Face Plate is fixed on a 6 $\frac{1}{2}$ " Rod mounted in the Strip 2 and the Double Angle Strip 6, and a  $\frac{7}{8}$ " Bevel Gear 29 is locked on the Rod. Above the Bevel Gear a Short Coupling is mounted loosely between Collars, and this supports one end of a 2" Rod 30. The other end of Rod 29 is carried in a Coupling 31, which is free to turn on a 4 $\frac{1}{2}$ " Rod 32 between a Collar and a  $\frac{7}{8}$ " Bevel Gear 33. Rod 32 is supported in 1" Corner Brackets bolted to the frame. Two  $\frac{7}{8}$ " Bevel Gears on the Rod 30 are arranged to mesh with the Bevel Gears 29 and 33, as shown in Fig. 2. A  $\frac{1}{2}$ " Pinion on Rod 32 is driven by a Worm Gear 34 on Rod 22. The arm 25 is held against the Threaded Pins in the Face Plate by a Spring arranged between the arm and the side of the frame.

Operating the Model

A length of bare copper wire should be wound on a large cotton reel mounted on a 3 $\frac{1}{2}$ " Rod supported in a 3" x 1 $\frac{1}{2}$ " Double Angle Strip. The Double Angle Strip is bolted to the Girder 10, and a Compression Spring on the Rod is arranged to press against the reel to prevent the wire from unwinding too freely. The wire from the reel is passed along the keyway of the 4" Rod with Keyway, through the boss of the Sprocket 14 and the centre hole of the Circular Plate 16, over a  $\frac{1}{2}$ " loose Pulley 35 on a 6 $\frac{1}{2}$ " Rod, through the Fishplate 26, and is attached to the drum.

A length of cotton or silk wound between the Pulleys 18 on each of the two 2 $\frac{1}{2}$ " Rods is passed through one of the Fishplates 17, and is tied firmly to the wire.

When the Electric Motor is set working the Plate 16 revolves, and the lengths of cotton or silk are wound round the wire. At the same time the wire is wound slowly on the take-up drum, so that a double covering of cotton or silk is wound evenly on the wire as it is pulled through the centre of the rotating assembly.

PARTS REQUIRED

9 of No. 2	1 of No. 26	1 of No. 96
2 " " 3	1 " " 26c	1 " " 109
2 " " 4	1 " " 27	2 " " 111c
2 " " 6a	1 " " 27a	2 " " 111d
2 " " 8	1 " " 27d	2 " " 115
14 " " 9	4 " " 30	3 " " 120b
2 " " 9a	2 " " 32	1 " " 124
3 " " 10	88 " " 37a	6 " " 133
2 " " 12a	80 " " 37b	2 " " 133a
1 " " 13a	30 " " 38	1 " " 136a
4 " " 14	1 " " 43	1 " " 146a
3 " " 15a	2 " " 45	1 " " 163
2 " " 16	1 " " 47a	1 " " 164
2 " " 16a	1 " " 48d	1 " " 166
1 " " 17	23 " " 59	1 " " 171
1 " " 19b	1 " " 62b	1 " " 179
1 " " 23	1 " " 63	1 " " 186c
5 " " 23a	1 " " 63d	1 " " 230
2 " " 24	1 " " 94	1 E20R(S) Electric Motor.
1 " " 25	1 " " 95b	